



Desktop Retransfer Dual-sided Card Printer

R300



Key Feature

Adopt high-resolution transfer dye-sublimation color printing technology.
 Higher image quality and clear text, realizing professional-level printing effects
 Perfectly realize the entire card over-edge printing
 High printing speed engine
 All-metal movement, more stable continuous printing ability of card
 Support PVC, composite PVC, ABS, PET, PC and other materials to print high-quality cards
 Standard dual-sided printing module, standard bend correction module
 With a 3.5-inch color touch-screen, the operation is more intuitive and convenient

Multi-function optional module

Dual interface card encoding module
 UHF chip card encoding module
 Contactless ID card encoding module
 Magnetic stripe card encoding module
 Electronic lock/mechanical lock of input hopper
 Electronic lock/ mechanical lock of defective card slot
 Electronic lock / mechanical lock of ribbon door
 Lamination module

Consumables

Monochrome black ribbon: 100x60mm
 Full panel YMCK ribbon: 1000 prints/roll
 Full panel YMCK ribbon: 500 prints/roll
 Full panel YMCKK ribbon: 500 prints/roll
 Security YMCUvk ribbon: 500 prints/roll
 Transparent retransfer film: 1000 prints/roll


Value-added functions

Alarm for no card, defective card slot
 Manual feeding card on back end and recycling pending card
 Available to set the direction of output card

SEAOBY R



Dye-sublimation transfer printing technology

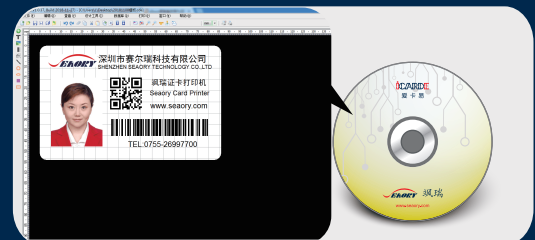

Professional printing software come with the printer

Specifications

| | |
|-------------------------------------|--|
| Product Name | R300 / Desktop Retransfer Dual-sided Card Printer |
| Printer Dimension | 568mm × 272mm × 398mm(Length x Width x Height),15Kg |
| Power | 100-240VAC, 50-60Hz |
| Print Speed | Monochrome black printing: 12-16s per card(single-sided), 30-34s per card(dual-sided) using ribbon saving technology Full-color YMCK Printing: 20s per card(single-sided), 38s per card(dual-sided) |
| Print Dimension | ISO CR80 (53.98mm×85.60mm) over-edge printing of the entire card |
| Print Resolution | 300dpi × 300dpi |
| Print Method | Dye sublimation retransfer printing |
| Memory | 256MB |
| Interfaces | Standard USB2.0 & Ethernet, WIFI(optional) |
| Card Material | PVC, composite PVC, ABS, PET, PC and other materials |
| Card Thickness | 0.3-1.05mm(hopper adjustment required) |
| Input hopper capacity | 200pcs(0.76mm) |
| Output hopper capacity | 200pcs(0.76mm) |
| Defective card slot capacity | 25pcs(0.76mm) |
| Buzzer | Yes |
| Indicator | Red and green two-color indicator |
| LCM Display | 3.5 inch color touch-screen |
| Software | Driver: Support 32-bit and 64-bit Windows® XP, 7, 8, 10, Windows® Server 2003/2008/2012/2016/2019, 32-bit and 64-bit Linux. Support Chinese operating systems, such as the NeoKylin, Kylin and UnionTech UOS. Card design software:ICARDE card design software Supports 32-bit and 64-bit Windows® XP, 7, 8, 10, Windows® Server 2003/2008/2012/2016/2019 |
| Warranty | Card printer: 3 years(artificial damage excluded)Print head: lifetime warranty |
| Operation Environment | Regular running temp: 15°C-30°C(59-86°F), 20%-65% RH non-condensing Lowest/ Highest running temp: 0°C(32°F)/40°C(104°F), 20% to 65% RH non-condensing. |
| Storage Environment | Temp.: -5°C-70°C(23-158°F), 20% to 70% RH non-condensing and ventilation environment |
| Certificates | CCC, CE, FCC, RoHS |

